


**Name:** Juan Carlos Canas  
**Date:** 6/12/2016  
**Track:** Freixedas Euro B

**Track Conditions**  
 Size:  Open  Med.  Tight  
 Traction:  High  Med.  Low  
 Surface:  Smooth  Med.  Bumpy


**Result**  
 Race Time / Lap: \_\_\_\_\_  
 Best Lap (1Lap): \_\_\_\_\_

### Front Suspension



Rebound Stop: 100


Upright:  E2129  
 E2105-B  
 Tension Rod:  E2107A(Long)  
 E2107B(Short)  
 Upper Arm Position:

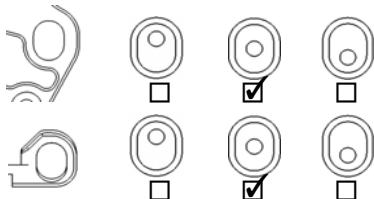


Ride Height: 25mm  
 Toe Angle: 1  
 Kingpin Ball Spacer(Upper): 1mm  
 (Lower): 1mm  
 Wheel Hub: +1  
 Anti Roll Bar:  $\phi$  2.4  
 Upper Arm Spacer: 3mm




Lower Arm Spacer: 0mm  
 Lower Arm Position (Kick Up):

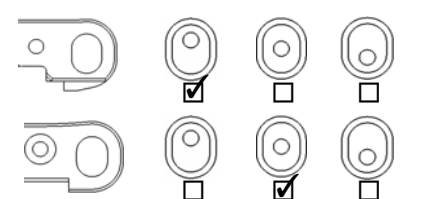

### Front Shocks




Piston: Kyo 1.2x8  
 Oil: #500  
 Spring: 9.25T

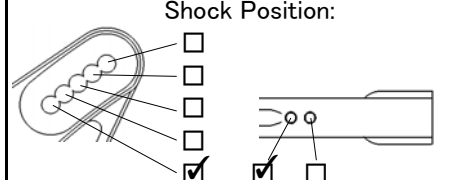


Shock Position:  
  
  
  
  
  
  
 Pivot Ball Position:  Front  Rear  
 Damper Stay:  E2502(Aluminum)  
 E2511(CFRP)

### Steering Ackerman




### Rear Suspension




Rebound Stop: 116


Upper Arm Position:




Lower Arm Position (Anti-Squat):




Ride Height: 27mm  
 Camber Angle: 2°  
 Wheel Hub: +2  
 Anti Roll Bar:  $\phi$  2.7  
 Lower Arm Spacer: 1mm

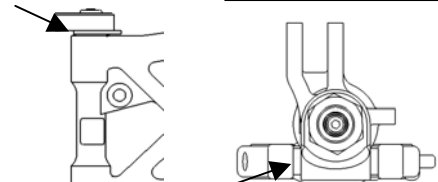


Upright Spacer: 2mm  
 Upright:  E2131  
 Other \_\_\_\_\_  
 Lower Arm Position (Toe Angle):

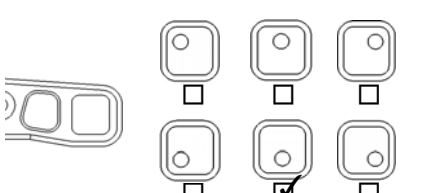

### Rear Shocks




Piston: Mugen 1.3x8  
 Oil: #500  
 Spring: 10.75T

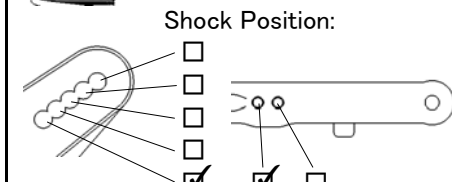

Shock Position:  
  
  
  
  
  
  
 Pivot Ball Position:  Front  Rear  
 Damper Stay:  E2522(Aluminum)  
 E2523(CFRP)

### Weight



### Engine

Type: Ultimate M-4R Plug: 6  
 Gasket: 0.25 Reducer: 8.0mm  
 Muffler: UR 2123 Fuel: Nitrolux  
 Engine Mount:  E0701(Standard)  E2701(One Piece)

### Diff. Oil

Front: #7,000 O-Ring: \_\_\_\_\_ pcs.  
 Center: #7,000 \_\_\_\_\_ pcs.  
 Rear: #3,000 \_\_\_\_\_ pcs.

### Tires


	Front	Rear
Type:	Procircuit Road Runner	Procircuit Road Runner
Compound:	Blue	Blue
Inserts:	Procircuit	Procircuit
Wheel:	Procircuit	Procircuit

### Clutch

Clutch Bell: 13T Spur Gear: 46T  
 Clutch Shoes: Alm x 3  
 Clutch Spring: 1.0mm x 3

### Body/Wing

Body: Ultimate  
 Wing: Stock



### Comments

+5mm rear shock stands  
 Al. servo saver part  
 UR 2123 (Ultimate Muffler)  
 3mm lowered rear body mount for Ultimate body