


Name: Robert Batlle
Date: October 2016
Track: Las Vegas Worlds

Track Conditions
 Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy


Result
 Race Time / Lap: _____
 Best Lap (1Lap): _____

Front Suspension




Rebound Stop: 99mm


Upright: E2129
 E2105-B
 Tension Rod: E2107A(Long)
 E2107B(Short)
 Upper Arm Position:

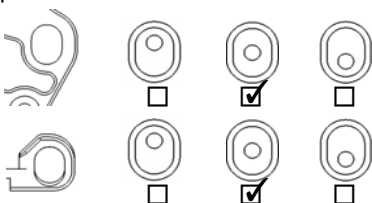


Ride Height: 24mm
 Toe Angle: 26mm
 Kingpin Ball Spacer(Upper): 1mm
 (Lower): 1mm
 Wheel Hub: +1
 Anti Roll Bar: ∅ 2.4
 Upper Arm Spacer: 2mm

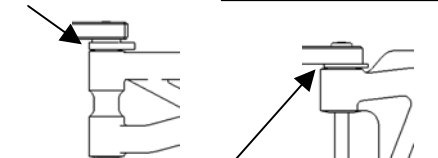

Lower Arm Spacer: 0mm
 Lower Arm Position (Kick Up):

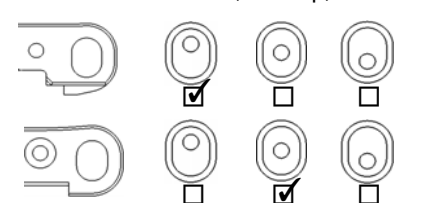


Front Shocks



Piston: 1.2x8
 Oil: #600
 Spring: 9.25T


Shock Position:

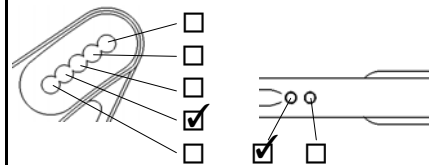


Pivot Ball Position: Front Rear
 Damper Stay: E2502(Aluminum)
 E2511(CFRP)

Steering Ackerman

↑ Front




Rear Suspension




Rebound Stop: 116mm


Upper Arm Position:




Lower Arm Position (Anti-Squat):




Ride Height: 30mm
 Camber Angle: 19mm
 Wheel Hub: +2
 Anti Roll Bar: ∅ 2.8
 Lower Arm Spacer: 0mm

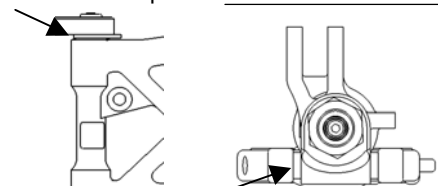

Upright Spacer: Med
 Upright: E2131
 Other _____
 Lower Arm Position (Toe Angle):

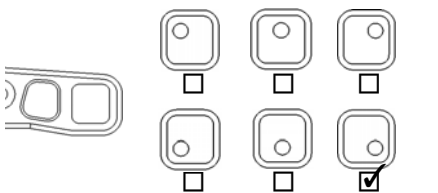


Rear Shocks




Piston: 1.3x8
 Oil: #550
 Spring: 10.75T

Shock Position:

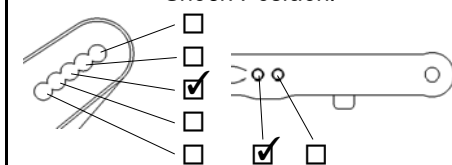

Pivot Ball Position: Front Rear
 Damper Stay: E2522(Aluminum)
 E2523(CFRP)

Weight

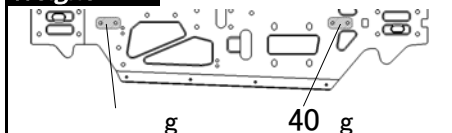

Engine

Type: Ultimate Plug: _____
 Gasket: _____ Reducer: _____
 Muffler: _____ Fuel: Nitrolux
 Engine Mount: E0701(Standard) E2701(One Piece)

Diff. Oil

Front: #6,000 O-Ring: _____ pcs.
 Center: #5,000 _____ pcs.
 Rear: #2,000 _____ pcs.

Tires

Front	Rear
Type: <u>ProCircuit Craymore</u>	Type: <u>ProCircuit Craymore</u>
Compound: _____	Compound: _____
Inserts: _____	Inserts: _____
Wheel: _____	Wheel: _____

Clutch

Clutch Bell: 13T Spur Gear: 46T
 Clutch Shoes: Alu. B9
 Clutch Spring: ∅ 0.9 x 1, 0.95 x 2

Body/Wing

Body: Ultimate
 Wing: Mugen
 Wing Position:
 Proto

Comments

Use Ultimate diff. oil with standard diffs.
 Use proto-type chassis