


Name: _____
 Date: _____
 Track: _____

Track Conditions
 Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy


Result
 Race Time / Lap: _____
 Best Lap (1Lap): _____

Front Suspension




Rebound Stop: _____


Upright: E2105-B
 E2129
 Tension Rod: E2107A(Long)
 E2107B(Short)

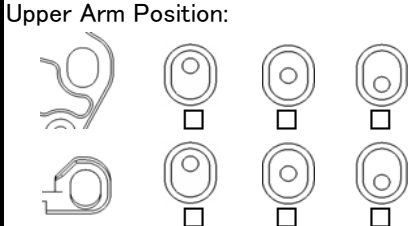


Ride Height: _____
 Toe Angle: _____
 Kingpin Ball Spacer(Upper): _____
 (Lower): _____
 Wheel Hub: _____
 Anti Roll Bar: _____
 Upper Arm Spacer: _____

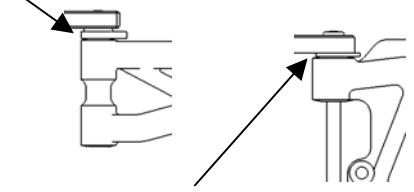


Lower Arm Spacer: _____
 Lower Arm Position (Kick Up): _____

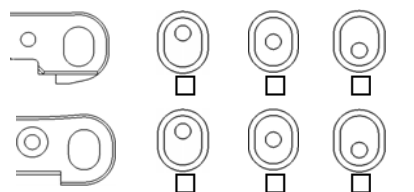

Front Shocks




Piston: _____
 Oil: _____
 Spring: _____



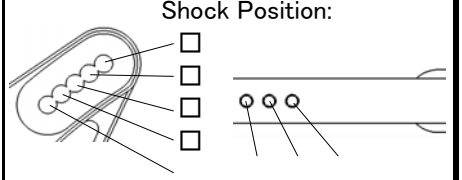


Pivot Ball Position: Front Rear


Rear Suspension




Rebound Stop: _____

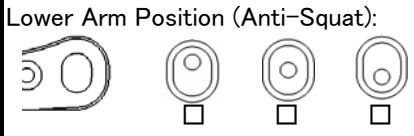


Ride Height: _____
 Camber Angle: _____
 Wheel Hub: _____
 Anti Roll Bar: _____
 Lower Arm Spacer: _____

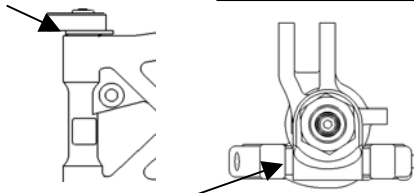


Upright Spacer: _____
 Upright: E2131
 Other _____
 Lower Arm Position (Toe Angle): _____

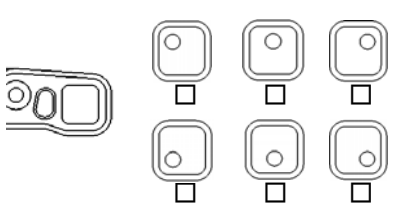

Rear Shocks




Piston: _____
 Oil: _____
 Spring: _____

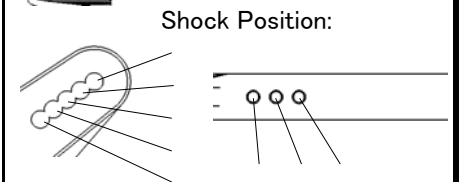

Pivot Ball Position: Front Rear

Weight

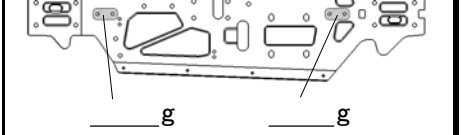

Engine

Type: _____ Plug: _____
 Gasket: _____ Reducer: _____
 Muffler: _____ Fuel: _____
 Engine Mount: E0701(Standard) E2701(One Piece)

Diff. Oil

O-Ring: _____ HT Diff
 Front: _____ pcs.
 Center: _____ pcs.
 Rear: _____ pcs.

Tires

Front

Rear


Type: _____
 Compound: _____
 Inserts: _____
 Wheel: _____

Clutch

Clutch Bell: _____ Spur Gear: _____
 Clutch Shoes: _____
 Clutch Spring: _____

Body/Wing

Wing Position:

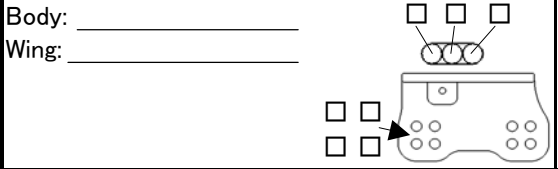

Comments

.....

