

Name: Atsushi Hara
Date: May 2018
Track: Circulo Verde Race Track - PM18


Track conditions

Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy

Result


Race time / Lap: _____
 Best lap (1Lap): _____

Front suspension

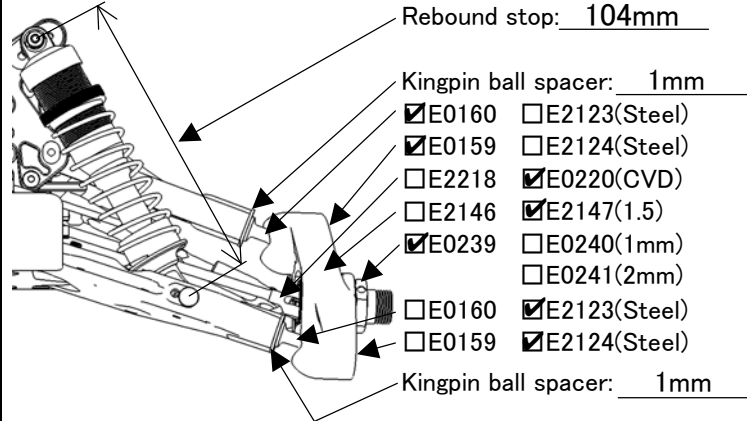


Ride height: 24mm
 Toe angle: Out 1°
 Lower arm plate:
 E2144A,B
 E2154(CFRP 1mm)
 E2155(CFRP 1.2mm)
 Anti roll bar: φ 2.4
 Upper arm spacer: 2mm
 Lower arm spacer: 1mm

Upper arm position:

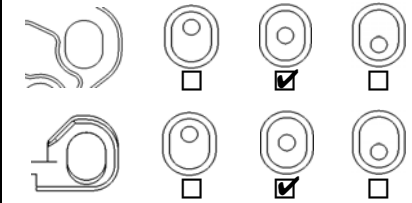

Lower arm position (Kick up):

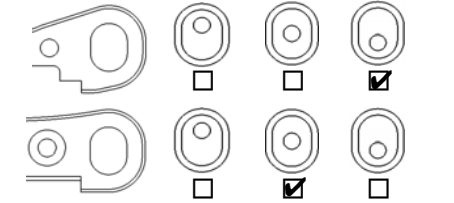


Front shocks

Piston: 1.3x8 Oil: #650
 Spring: φ 1.6 L70/9.25T
 Shock position:

 Pivot ball position: Front Rear
 Damper stay: E2562(Aluminum)
 E2565(CFRP)

Steering ackerman




Front upper plate

E2148D E2158(CFRP)

Servo saver arm


E2301A E2310(Aluminum)

Rear suspension

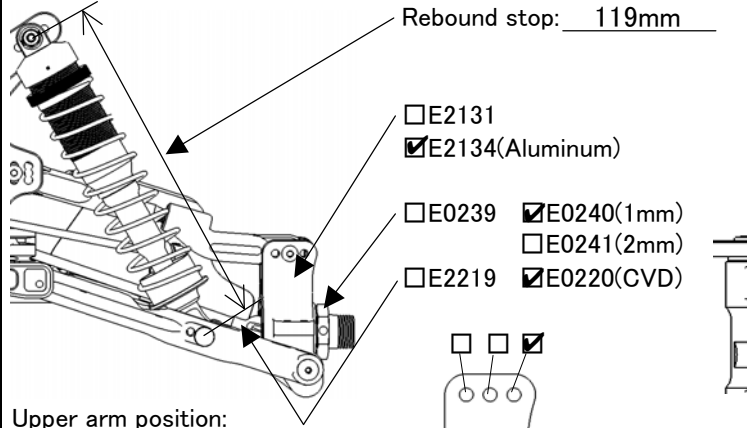


Ride height: 28mm
 Camber angle: -2.5
 Lower arm plate:
 E2145A,B
 E2156(CFRP 1mm)
 E2157(CFRP 1.2mm)
 Anti roll bar: φ 2.7
 Lower arm spacer: 0mm
 Upright spacer: 2.5mm

Upper arm position:

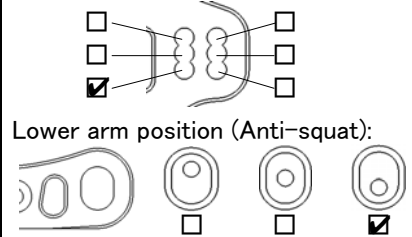

Lower arm position (Toe angle):

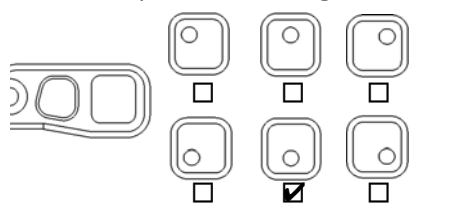

Rear shocks

Piston: 1.3x8 Oil: #600
 Spring: φ 1.6 L86/10.5T
 Shock position:

 Pivot ball position: Front Rear
 Damper stay: E2563(Aluminum)
 E2566(CFRP)

Center shaft

E0223,E0259 E2228,E2229

Tension rod

Front: E2107A(Long) E2107B(Short)
 Rear: E2148C E0803(Rubber)

Weight



Engine

Type: O.S Speed B2101 Plug: P3 Reducer: 6
 Muffler: O.S 2060 Fuel: _____ Gasket: _____
 Engine mount: E0701(Standard) Other E2701 One piece

Diff. Gear

Oil
 Front: 44/13T 42/12T #6,000
 Rear: 44/13T 42/12T #3,000
 Center: 44T 46T #6,000
 47T 48T


Tires

	Front	Rear
Type:	<u>Pro-Line Fugitive</u>	<u>Pro-Line Fugitive</u>
Compound:	<u>X2</u>	<u>X2</u>
Inserts:	<u>Pro-Line</u>	<u>Pro-Line</u>
Wheel:	<u>Pro-Line</u>	<u>Pro-Line</u>

Clutch

3P 4P
 Clutch bell: 13T 14T
 Clutch shoes C0754 E0704 E0710 E2706
 Clutch spring 0.8 0.9 0.95 1.0 1.05 1.1

Body/Wing

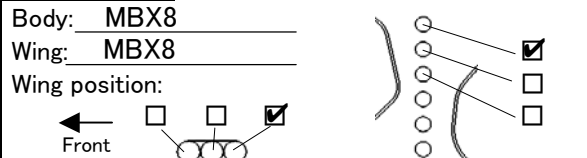

Comments

C0754/1.05, E0710/1.05, E0710/1.0