DRIVER:	SHOKI	TRACK:	IFS	TRANSMITTER:	SANWA	TH.SERVO:	PGS-LH II	TIRE:	MATRIX 32/35
DATE:	2026.04.19	SURFACE: ROUGH ○ SMOOTH ◉		RECEIVER:	SANWA	TH.EXPO:	-	TIRE SIZE(F/R):	68/76
OUTSIDE TEMP. :	25	LAYOUT: TIGHT ○ MIXED ◉ FAST ○		ST.SERVO:	PGS-XR II	TH.SPEED:	-	ADDITIVE:	-
TRACK TEMP. :	-	TRACTION: LOW ○ MID. ◉ HIGH ○		ST.EXPO:	-	1ST.GEAR PINION/SPUR:	19/61	ADDITIVE TIME:	-
REV.2601		RACE: IFS	RESULT: 1	ST.SPEED:	-	2ND.GEAR PINION/SPUR:	24/57		

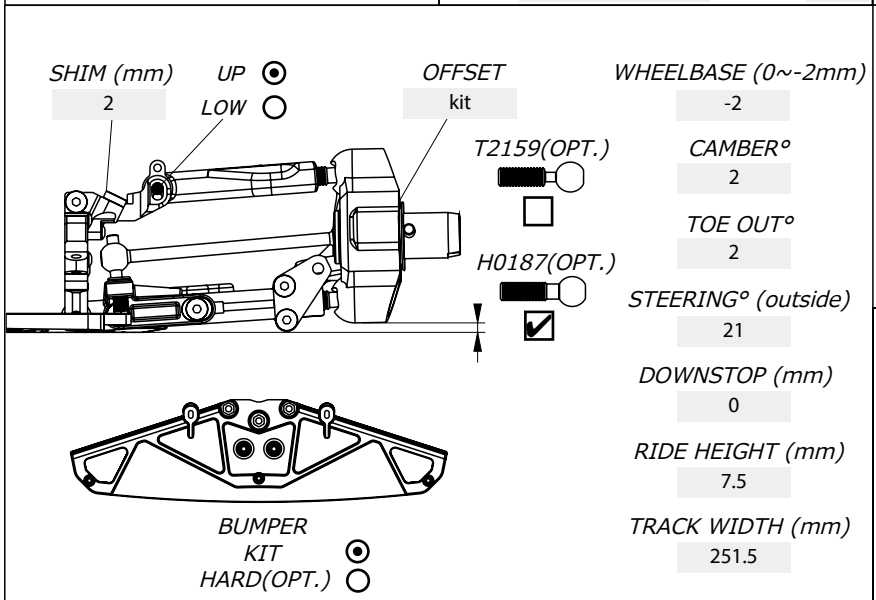

WHEELBASE (0~-2mm): -2
CAMBER°: 2
TOE OUT°: 2
STEERING° (outside): 21
DOWNSTOP (mm): 0
RIDE HEIGHT (mm): 7.5
TRACK WIDTH (mm): 251.5



ST.(mm): 21
TH.(mm): 21

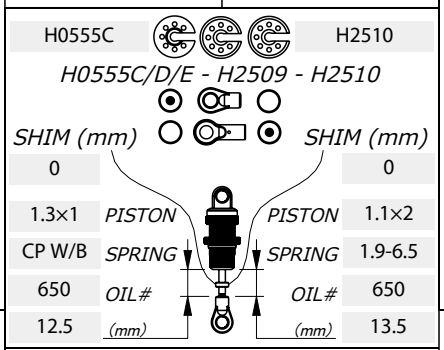

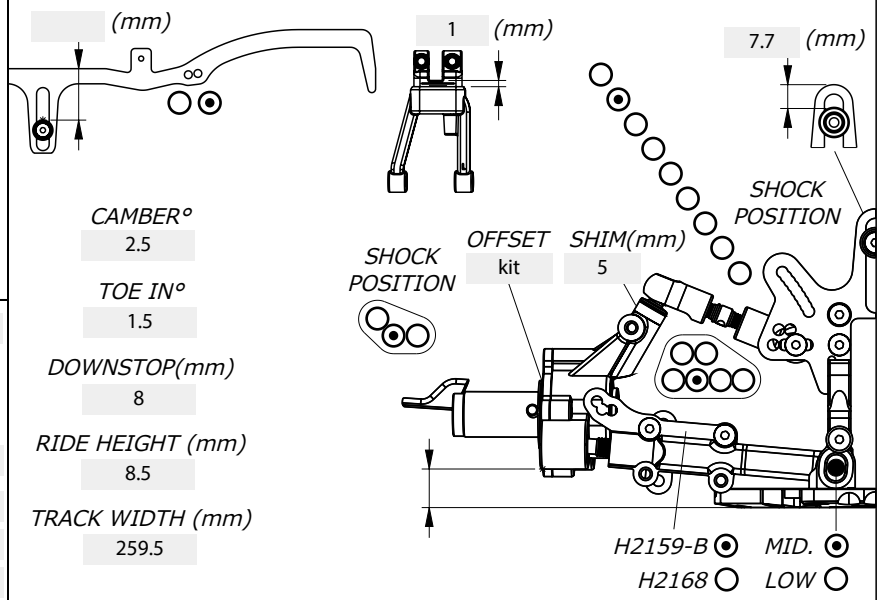

CAMBER°: 2.5
TOE IN°: 1.5
DOWNSTOP(mm): 8
RIDE HEIGHT (mm): 8.5
TRACK WIDTH (mm): 259.5

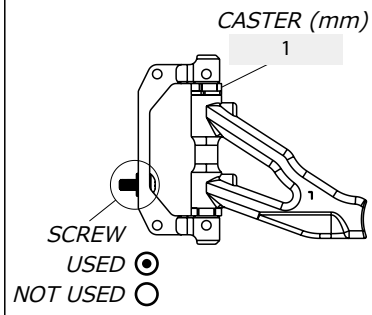







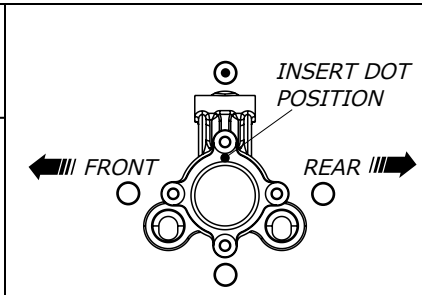



CAR OVERALL WEIGHT(g):

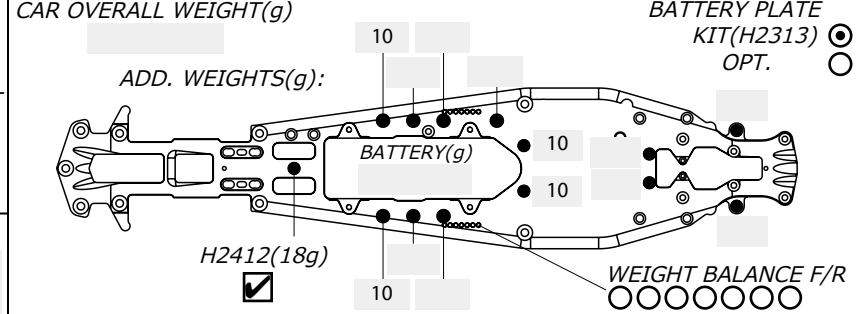

BATTERY PLATE
KIT(H2313) ◉
OPT. ○

BUMPER WEIGHT (g)



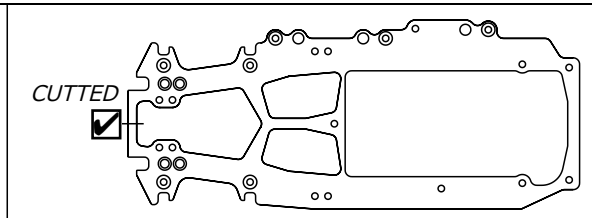

BODYSHELL & WING TYPE: Hyper Diabio
DISTANCE TO BUMPER(mm): 9 (mm)
BODYSHELL WEIGHT(g): -

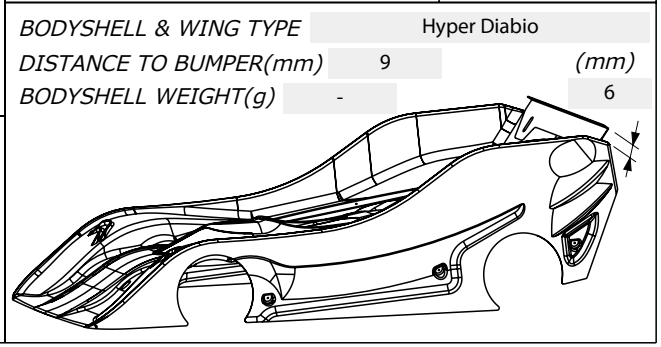

NOTE:
フロントワンウェイ下に重り30ｇ
Installed 30g weight under the front one-way.

FRONT ← → REAR

MRX7
1/8TH SCALE 4WD NITRO POWERED RACE CAR