


Name: _____
Date: _____
Track: _____

Track Conditions
 Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy


Result
 Race Time / Lap: _____
 Best Lap (1Lap): _____

Front Suspension

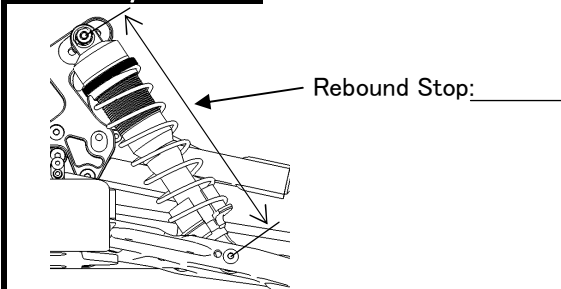


Tension Rod: E2107A(Long)
 E2107B(Short)

Upper Arm Position:

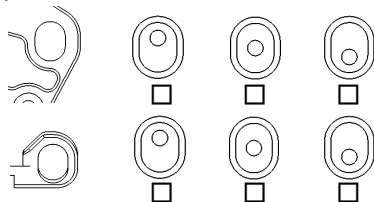


Ride Height: _____
 Toe Angle: _____
 Kingpin Ball Spacer: _____
 Wheel Hub: _____
 Anti Roll Bar: _____
 Upper Arm Spacer: _____

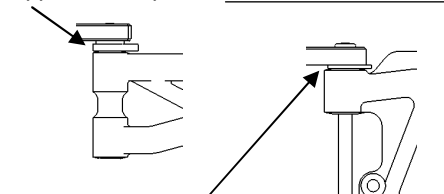


Lower Arm Spacer:

Lower Arm Position (Kick Up):

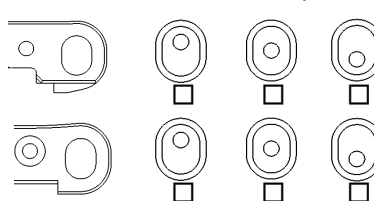


Front Shocks

Piston: _____
 Oil: _____
 Spring: _____
 Spring Adj: _____

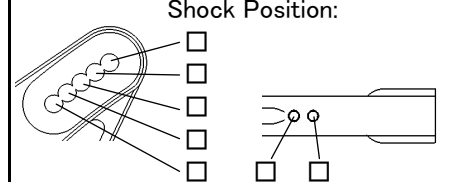


Pivot Ball Position: Front Rear
 Damper Stay: E2502(Aluminum)
 E2511(CFRP)


Steering Ackerman




Rear Suspension

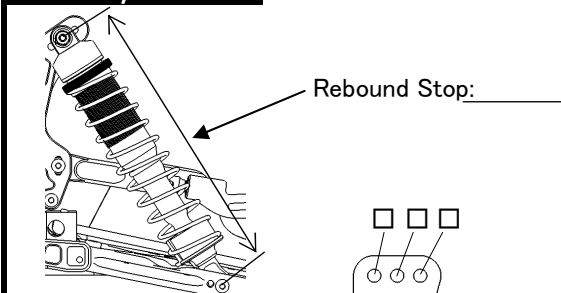


Upper Arm Position:

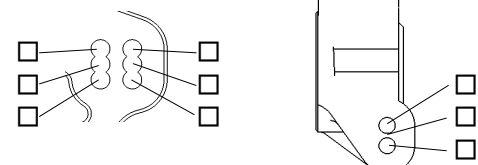

Lower Arm Position (Anti-Squat):




Ride Height: _____
 Camber Angle: _____
 Wheel Hub: _____
 Anti Roll Bar: _____
 Lower Arm Spacer: _____

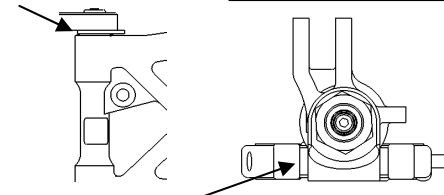

Upright Spacer:


Upright: E2106-B
 E2118(Aluminum)

Lower Arm Position (Toe Angle):

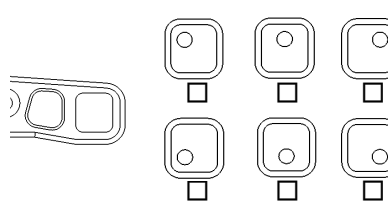

Rear Shocks

Piston: _____
 Oil: _____
 Spring: _____
 Spring Adj: _____

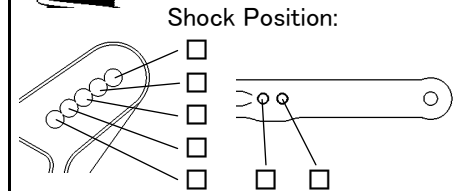

Pivot Ball Position: Front Rear
 Damper Stay: E2503(Aluminum)
 E2514(CFRP)

Power Train

Motor: _____
 ESC: _____
 Battery: _____

Diff. Oil

Front: _____ O-Ring: _____ pcs.
 Center: _____ pcs.
 Rear: _____ pcs.

Tires

	Front	Rear
Type:	_____	_____
Compound:	_____	_____
Inserts:	_____	_____
Wheel:	_____	_____

Gearing

Pinion gear: _____ T
 Spur gear: 44T(E0255) 46T(E0256)

Body/Wing

Body: _____
 Wing: _____

Comments

