


Name: _____
Date: _____
Track: _____

Track Conditions

Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy

Front Suspension

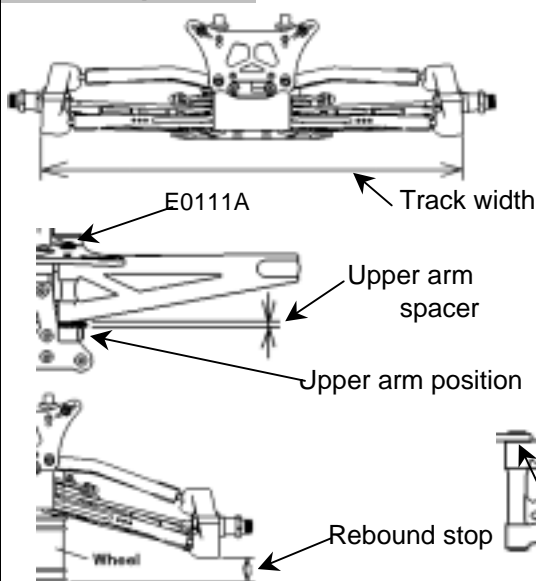

Track width _____ mm
 Camber angle _____ °
 Upper arm spacer _____ mm
 Toe angle _____ °
 Rebound stop _____ mm
 Anti-roll bar Use _____ mm
 None
 Lower arm mount (Kick up) _____ °
 Upper arm position (E0111A)
 E0106A - E0106B (High)
 E0106C - E0106D (Low)
 Lower arm spacer _____ mm


Front Shocks

Piston _____
 Oil # _____
 Spring _____
 Spacer _____ mm
 Shock position

Steering Ackerman



Rear Suspension

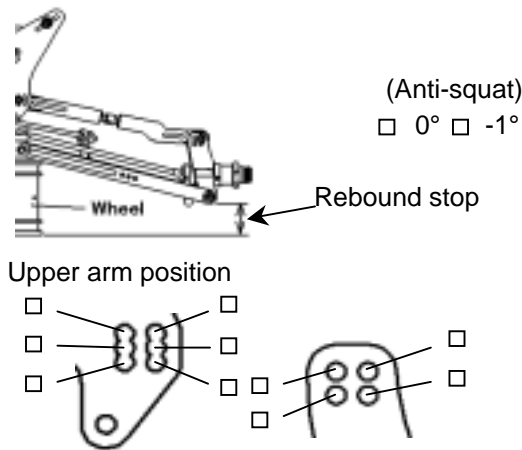


Camber angle _____ °
 Lower arm mount _____ °
 Rebound stop _____ mm
 Anti-roll bar _____ mm
 Anti-squat (E0111C,E0111D)
 Upright E0110
 E0126(Aluminium)
 Wheelbase adjustment _____ mm

Rear Shocks

Piston _____
 Oil # _____
 Spring _____
 Spacer _____ mm
 Shock position

Wing Position



Engine Type _____ Plug _____
 Gasket _____ mm Rrducer ϕ _____
 Muffler _____ Manifold _____
 Fuel _____

Diff. Oil
 Front # _____ O-Ring ___ pcs. Other _____
 Center # _____ pcs. Other _____
 Rear # _____ pcs. Other _____

Tire

<Front>	<Rear>
Type _____	Type _____
Foam _____	Foam _____

Clutch
 Clutch shoes Aluminium Other _____
 Spring _____ mm
 Clutch bell / Spur gear **T / T**

Result
 Race time / Lap _____
 Best lap (1Lap) _____

Comments:

