


Name: _____
 Date: _____
 Track: _____

Track Conditions

Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy

Front Suspension

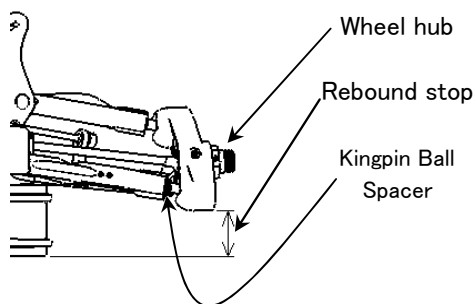

Kingpin ball spacer 1 mm
 Camber angle -1.5 °
 Upper arm spacer 2 mm
 Toe angle out 1 °
 Rebound stop 18 mm
 Anti-roll bar ϕ 2.5 mm
 Wheel Hub 0 mm
 Lower arm mount (Kick up)




Lower arm plate (E0154A) 0 1

Upper arm position (E0148B, E0148C)




Lower arm spacer 1 mm

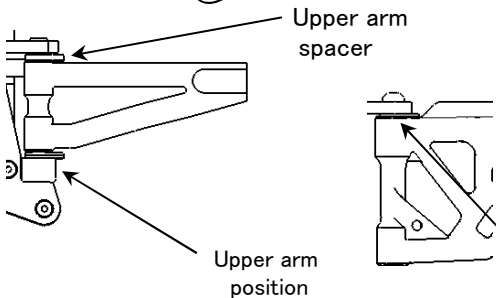


Front Shocks

Piston Stock
 Oil # 450
 Spring L75-8.25
 Spring adjustment _____ mm




Shock position



Steering Ackerman






Rear Suspension

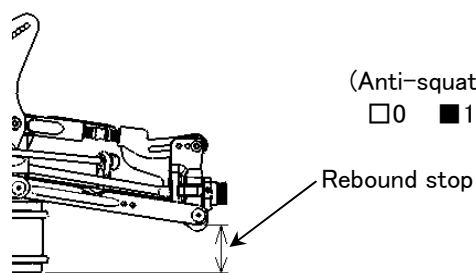

Camber angle -2.5 °
 Lower arm mount E0185(Aluminium) (Toe angle) 2.75 °
 Rebound stop 18 mm
 Anti-roll bar ϕ 3 mm
 Anti-squat (E0111C, E0111D)


Upright E0152 E0173(Aluminium)

Wheelbase adjustment 2.5 mm

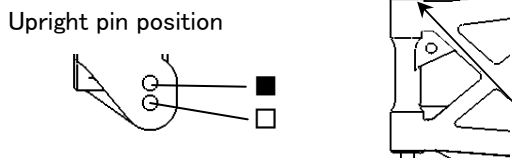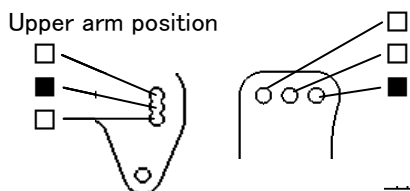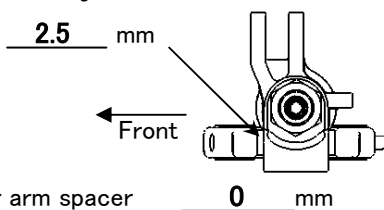


Rear Shocks


Piston Stock
 Oil # 400
 Spring L86-8.25
 Spring adjustment _____ mm



Shock position



Wing Position



Engine Type _____
 Gasket _____ mm Reducer ϕ _____
 Plug _____ Fuel _____
 Muffler _____

Diff. Oil
 Front # 7000 O-Ring 0 pcs. Other _____
 Center # 7000 0 pcs. Other _____
 Rear # 3000 0 pcs. Other _____

Tire

Front	Rear
Type _____	Type _____
Foam _____	Foam _____

Clutch
 Clutch shoes Aluminium _____
 Other _____
 Spring 1.0 mm
 Clutch bell / Spur gear 13T / 44T

Result
 Race time / Lap _____
 Best lap (1Lap) _____

Comments:

