


Name: _____
 Date: _____
 Track: _____


Track Conditions
 Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy

Result
 Race Time / Lap: _____
 Best Lap (1Lap): _____


Front Suspension

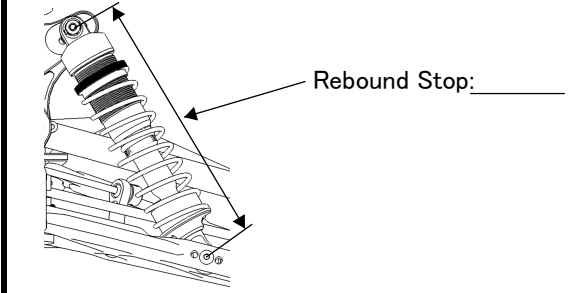


Tension Rod: E2107A(Long)
E2107B(Short)

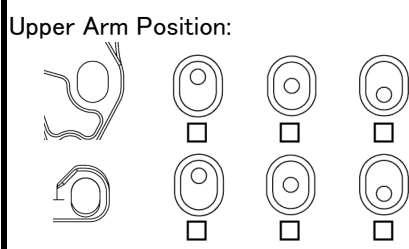



Ride Height: _____
 Toe Angle: _____
 Kingpin Ball Spacer: _____
 Wheel Hub: _____
 Anti Roll Bar: _____
 Upper Arm Spacer: _____

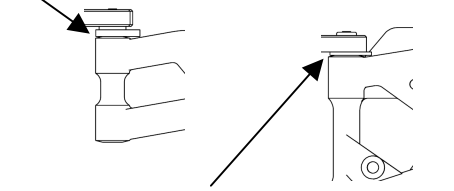

Lower Arm Spacer: _____



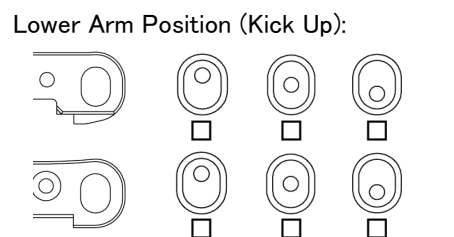


Front Shocks

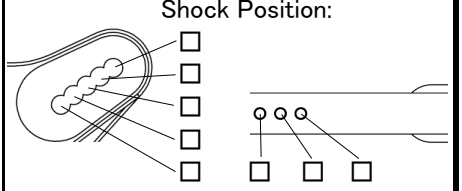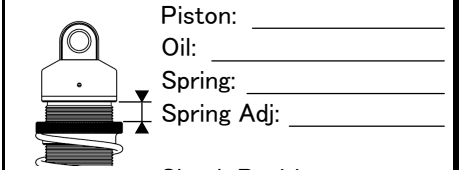


Pivot Ball Position: Front Rear


Rear Suspension

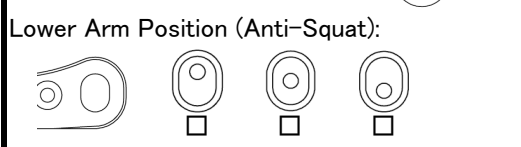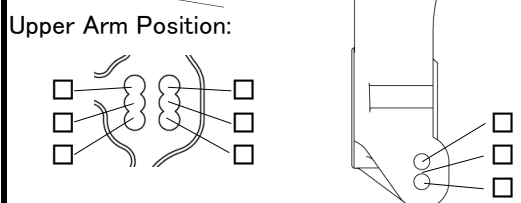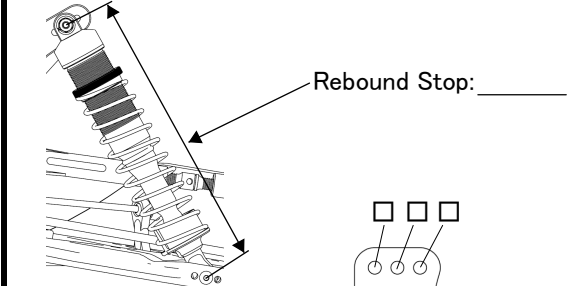



Ride Height: _____
 Camber Angle: _____
 Wheel Hub: _____
 Anti Roll Bar: _____
 Lower Arm Spacer: _____

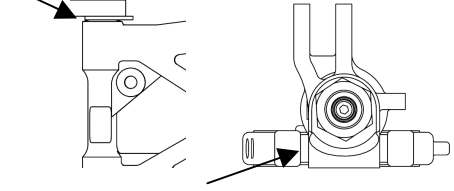

Upright Spacer:
 Upright: E2106-B
E2118(Aluminum)
 Lower Arm Position (Toe Angle):

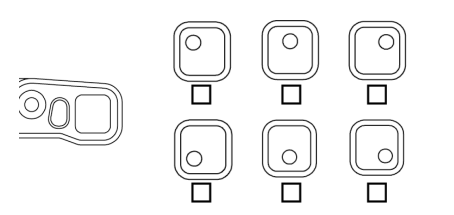

Rear Shocks

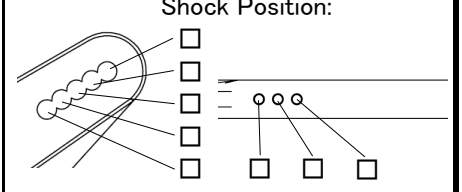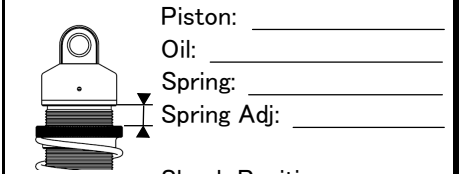

Pivot Ball Position: Front Rear

Engine
 Type: _____ Plug: _____
 Gasket: _____ Reducer: _____
 Muffler: _____ Fuel: _____
 Engine Mount: E0701(Standard) E2701(One Piece)

Diff. Oil
 Front: _____ O-Ring: _____ pcs.
 Center: _____ pcs.
 Rear: _____ pcs.

Tires

	Front	Rear
Type:	_____	_____
Compound:	_____	_____
Inserts:	_____	_____
Wheel:	_____	_____

Clutch
 Clutch Bell: _____ Spur Gear: _____
 Clutch Shoes: _____
 Clutch Spring: _____

Body/Wing

Body: _____
 Wing: _____

Wing Position:

Comments

.....

