

Name: _____
Date: _____
Track: _____


Track conditions

Size: ☐ Open ☐ Med. ☐ Tight
Traction: ☐ High ☐ Med. ☐ Low
Surface: ☐ Smooth ☐ Med. ☐ Bumpy


Result

Race time / Lap: _____
Best lap (1Lap): _____


Front suspension

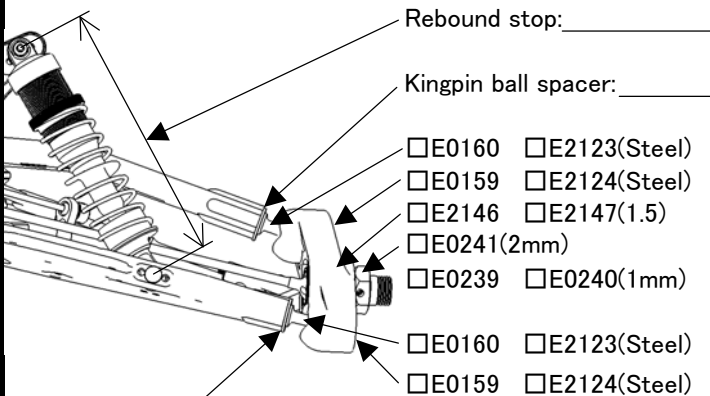

Kingpin ball spacer: _____
Upper arm position:

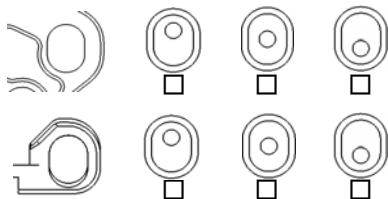


Ride height: _____
Toe angle: _____
Lower arm plate:
☐ E2161A,B
☐ E2166(CFRP)
Anti roll bar: _____
Upper arm spacer:




Lower arm spacer:


Lower arm position (Kick up):

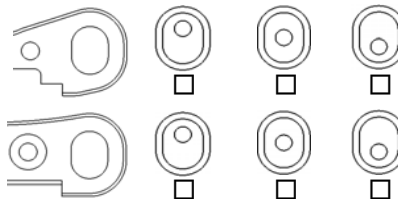


Rear suspension

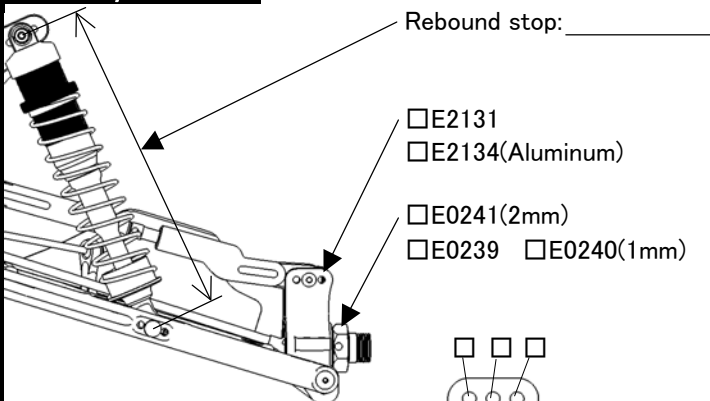


Upper arm position:




Lower arm position (Anti-squat):



Ride height: _____
Camber angle: _____
Lower arm plate:
☐ E2162A,B
☐ E2167(CFRP)
Anti roll bar: _____
Lower arm spacer:




Lower arm position (Toe angle):

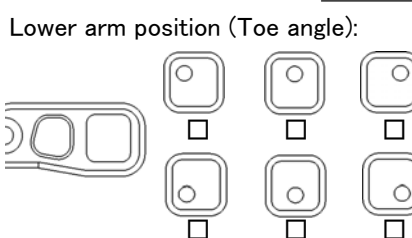

Front shocks

Piston: _____ Oil: _____
Spring: _____
Shock position:

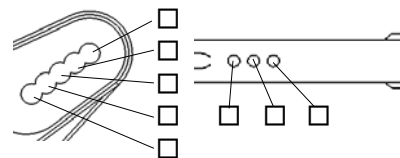


Pivot ball position:

☐ Front ☐ Rear

Steering ackerman

Front



Front upper plate


☐ E2148D ☐ E2158(CFRP)

Servo saver arm

☐ E2301A ☐ E2310(Aluminum)

Rear shocks

Piston: _____ Oil: _____
Spring: _____
Shock position:

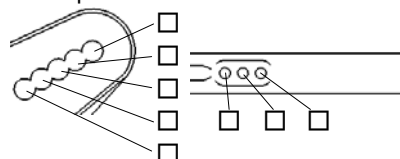

Pivot ball position:

☐ Front ☐ Rear

Center shaft


☐ E2215,E2216(CVD) ☐ E2230,E2231

Tension rod

Front: ☐ E2107A(Long) ☐ E2107B(Short)

Rear: ☐ E2148C ☐ E0803(Rubber)

Weight



Engine

Type: _____ Plug: _____ Reducer: _____
Muffler: _____ Fuel: _____ Gasket: _____
Engine mount: ☐ E0701(Standard) ☐ E2713(One Piece)

Tires


Front

Rear

Type: _____
Compound: _____
Inserts: _____
Wheel: _____

Body/Wing

Body: _____
Wing: _____
Wing position:



Comments

Diff. gear

Front: _____
Rear: _____
Center: ☐ 44T ☐ 46T
☐ 47T ☐ 48T

Clutch

Clutch bell:

☐ 13T ☐ 14T

	$\phi 0.9$	$\phi 0.95$	$\phi 1.0$	$\phi 1.05$	$\phi 1.1$
A	☐ C0754	☐ E0704	☐ E0710		
B	☐ C0754	☐ E0704	☐ E0710		
C	☐ C0754	☐ E0704	☐ E0710		

Oil