


Name: _____
Date: _____
Track: _____


Track Conditions
Size: Open Med. Tight
Traction: High Med. Low
Surface: Smooth Med. Bumpy

Result
Race Time / Lap: _____
Best Lap (1Lap): _____

Front Suspension

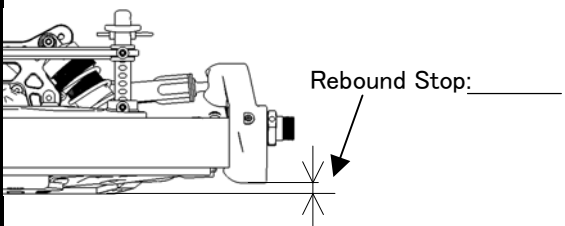


Upright: E2129
 E2105-B
Tension Rod: E2107A(Long)
 E2107B(Short)

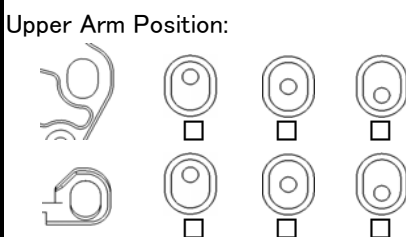


Ride Height: _____
Toe Angle: _____
Kingpin Ball Spacer(Upper): _____
(Lower): _____



Wheel Hub: _____
Anti Roll Bar: _____
Upper Arm Spacer: _____

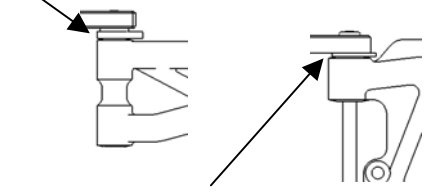

Lower Arm Spacer: _____
Lower Arm Position (Kick Up): _____



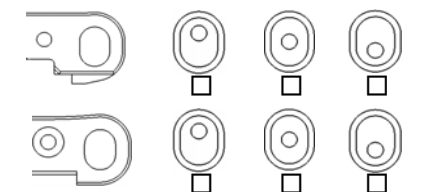


Front Shocks

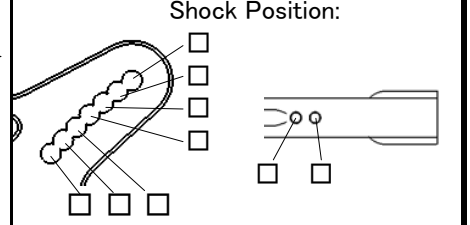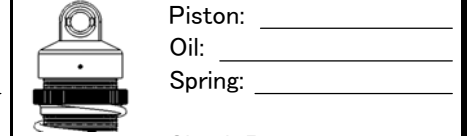


Pivot Ball Position: Front Rear
Damper Stay: E2537(Aluminum)
 E2542(CFRP)


Rear Suspension

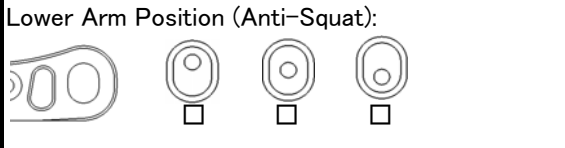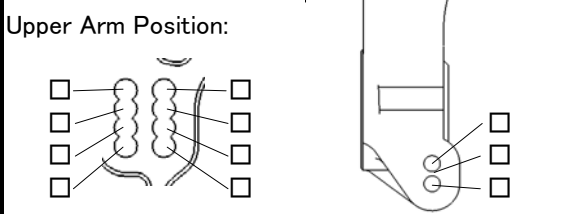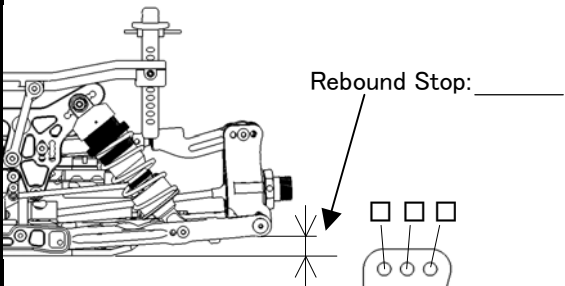



Ride Height: _____
Camber Angle: _____
Wheel Hub: _____
Anti Roll Bar: _____
Lower Arm Spacer: _____

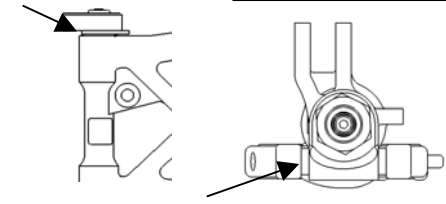

Upright Spacer:
Upright: E2131(Plastic)
 E2134(Aluminum)
Lower Arm Position (Toe Angle): _____

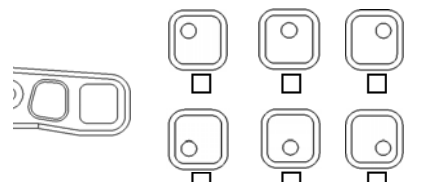

Rear Shocks

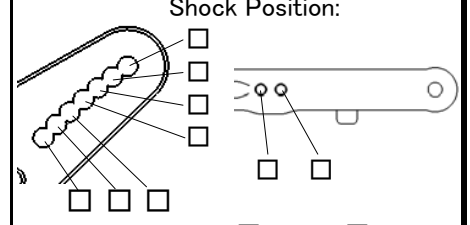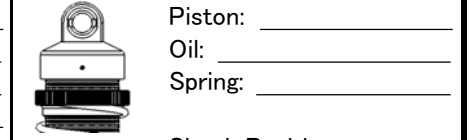

Pivot Ball Position: Front Rear
Damper Stay: E2538(Aluminum)
 E2543(CFRP)

Diff. Oil

Front: _____
Rear: _____

Engine

Type: _____ Plug: _____
Gasket: _____ Reducer: _____
Muffler: _____ Fuel: _____
Engine Mount: E0701(Standard) E2701(One Piece)

Clutch

Clutch Shoes: _____
Clutch Spring: _____

Gear Ratio

1st. 15T 16T 17T 18T
 48T 49T 50T
2nd. 19T 20T 21T
 45T 46T 47T

Tires

	Front	Rear
Type:	_____	_____
Inserts:	_____	_____
Wheel:	_____	_____

Weight



Body/Wing

Body: _____
Wing: _____

Comments

.....
.....
.....
.....