


Name: E2018
 Date: _____
 Track: _____


Track Conditions
 Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy

Result
 Race Time / Lap: _____
 Best Lap (1Lap): _____


Front Suspension

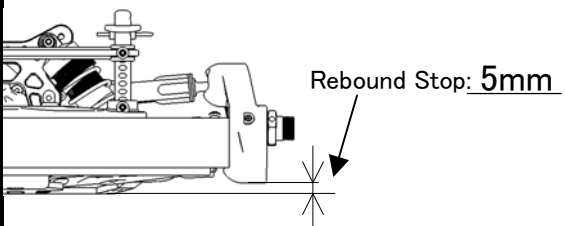


Upright: E2129
 E2105-B
 Tension Rod: E2107A(Long)
 E2107B(Short)

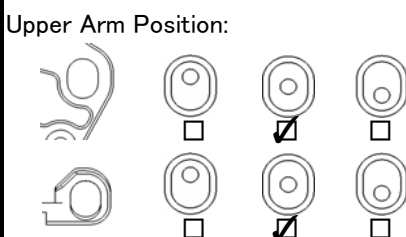

Ride Height: 9mm
 Toe Angle: OUT
 Kingpin Ball Spacer(Upper): 2.5mm
 (Lower): 0
 Wheel Hub: E0239 (0)
 Anti Roll Bar: E2136 (φ 2.7)
 Upper Arm Spacer: 0

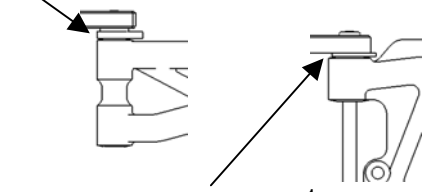


Lower Arm Spacer: 1mm
 Lower Arm Position (Kick Up):

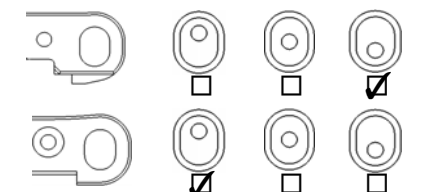


Front Shocks

Piston: E2534
 Oil: #600
 Spring: Silve



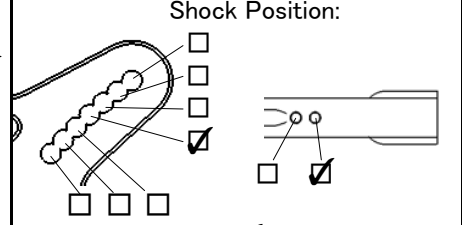


Pivot Ball Position: Front Rear
 Damper Stay: E2537(Aluminum)
 E2542(CFRP)


Steering Ackerman




Rear Suspension

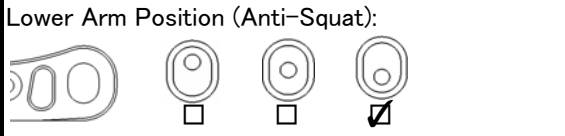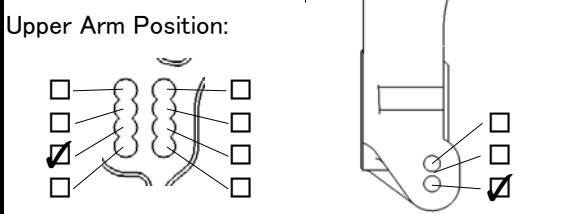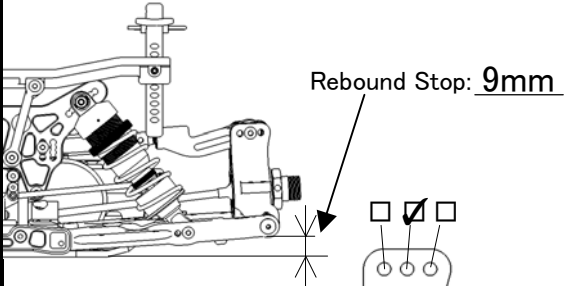

Ride Height: 10mm
 Camber Angle: -1.5°
 Wheel Hub: E0239 (0)
 Anti Roll Bar: E0176 (φ 2.6)
 Lower Arm Spacer: 0

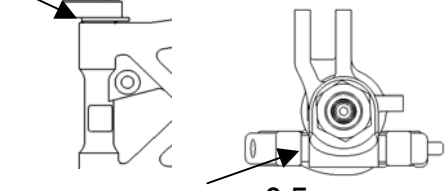


Upright Spacer: 2.5mm
 Upright: E2131(Plastic)
 E2134(Aluminum)
 Lower Arm Position (Toe Angle):

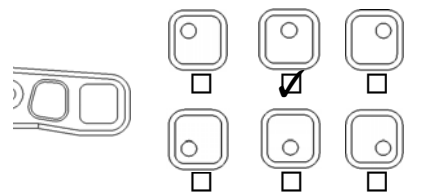

Rear Shocks

Piston: E2534
 Oil: #600
 Spring: Silve

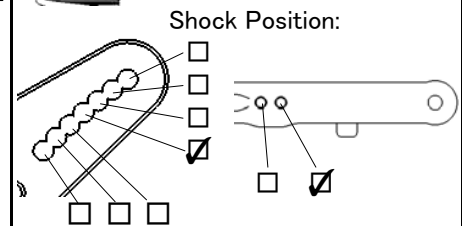

Pivot Ball Position: Front Rear
 Damper Stay: E2538(Aluminum)
 E2543(CFRP)

Diff. Oil

Front: #300,000
 Center: #300,000
 Rear: #50,000

Power Train

Motor: _____
 ESC: _____
 Battery: _____


Gear Ratio

Pinion Gear: 12T 13T 14T
 15T 16T 17T
 18T
 Spur Gear: 44T 46T

Tires

	Front	Rear
Type:	_____	_____
Inserts:	_____	_____
Wheel:	_____	_____

Weight



Body/Wing

Body: _____
 Wing: _____

Comments

.....

