SETUP

DRIVER		
DATE		
TRACK		

TRACTION

LOW ☐	MEDIUM ☒	HIGH ☐

LAYOUT

SLOW ☐	MIXED ☒	FAST ☐

ENGINE

TYPE		
GLOW PLUG/FUEL		
PIPE/ MANIFOLD		

CLUTCH SETTINGS

SHOE#/BELL#	kit	kit
CLEARANCE(mm) /AXIALPLAY(mm)	0,6	0,1-0,2
SPRING#/ TENSION(mm)	kit	0,1-0,2

TYRES

CONTROLLED ☐

FRONT		BRAND	REAR	
LEFT	RIGHT		LEFT	RIGHT
32	32	SHORE	35	35
69	69	DIAMETER START	76	76
		DIAMETER 5min		

SHOCK ABSORBERS

FRONT		REAR	
PISTON	kit	PISTON	kit
OIL	kit	OIL	kit
SPRING	kit	SPRING	kit

ANTI ROLL BAR FRONT

2,2 ☐ 2,3 ☒ 2,4 ☐ 2,5 ☐

ANTI ROLL BAR REAR

2,8 ☐ 2,9 ☒ 3,0 ☐

SERVO SAVER POSITION

FORWARD ☐ ☒ ☐ REARWARD

1 ☒ 2 ☐ 3 ☐

PINION 1st

15T ☐ 16T ☒

PINION 2nd

19T ☐ 20T ☒

SPUR 1st

48T ☐ 49T ☒ 50T ☐

SPUR 2nd

45T ☐ 46T ☒ 47T ☐

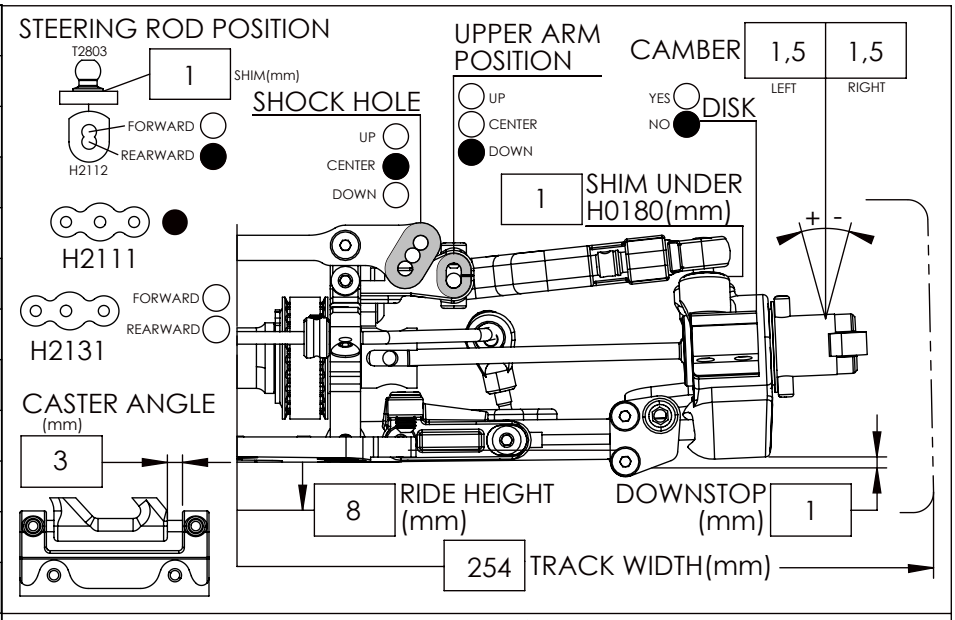

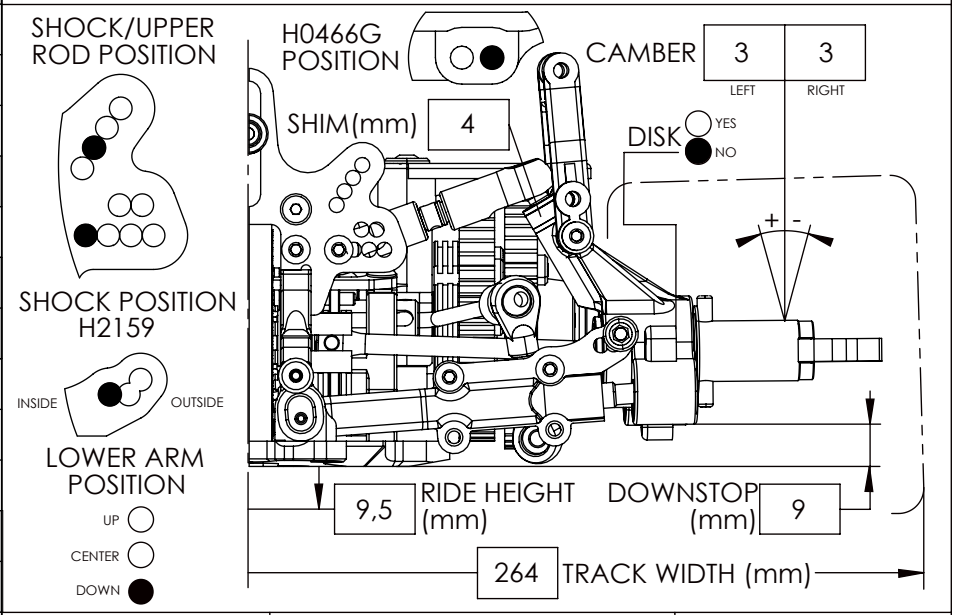

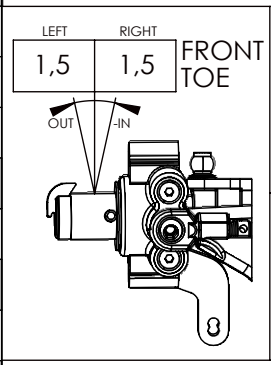

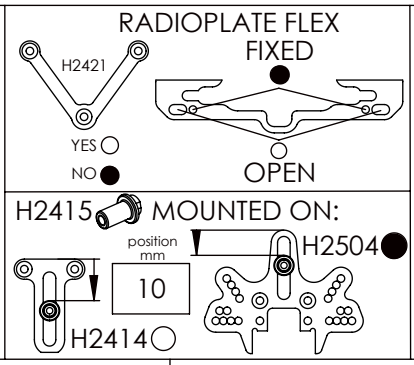

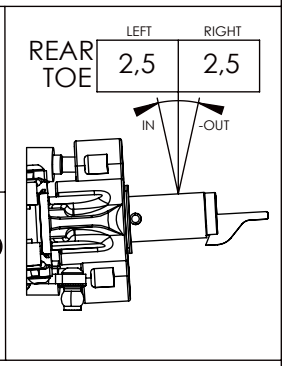

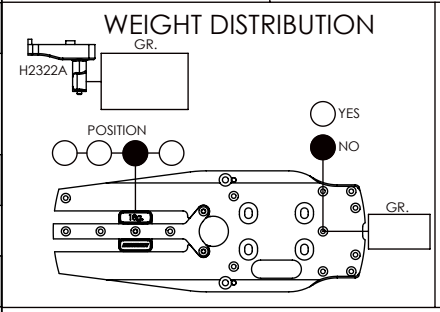

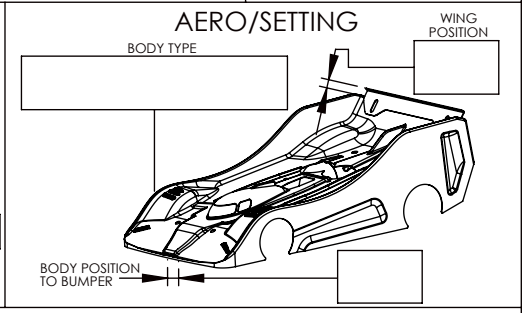

NOTES: