

Name: Masao Tanaka
Date: 2/15/2003
Track: Ft. Myers, Florida, USA


Track Conditions

Size:	<input type="checkbox"/> Open	<input type="checkbox"/> Med.	<input checked="" type="checkbox"/> Tight
Traction:	<input checked="" type="checkbox"/> High	<input type="checkbox"/> Med.	<input type="checkbox"/> Low
Surface:	<input checked="" type="checkbox"/> Smooth	<input type="checkbox"/> Med.	<input type="checkbox"/> Bumpy


Front suspension

Track width 253 mm
Ride height 7 mm
Camber angle -2 °
Caster angle 2 mm
Toe angle Out 1 °
Rebound stop 1 mm
Bump stop
 None Use


Anti-roll bar

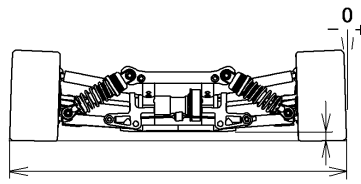

Rebound stop



Caster Angle



Front shocks

Piston 1.3x1
Oil # 600
Spring White

Shock position




Steering Ackerman (H0364)


A B C

Rear suspension


Track width 263 mm
Ride height 8 mm
Camber angle -3 °
Toe angle In 1.5 °
Rebound stop 8 mm
Bump stop
 None Use
Anti-roll bar Wire 3 mm Adjustable
Lower arm position
 5.5mm(A-C) 6.5mm(B-D)
H0180 Position 1.5 mm

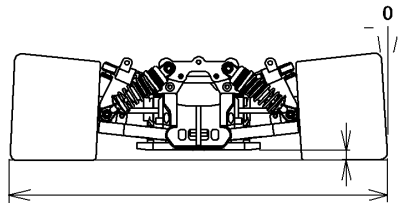

Rebound stop




H0180 Position



Rear shocks

Piston 1.1x2
Oil # 600
Spring Pink

Shock position



Engine Type RX21 RACE WC JP
Gasket 0.6 mm Muffler 086
Plug C8Tf Fuel Mugen Seiki Racing Fuel
Reducer 9

Clutch Clutch shoes Black Gray
Centrifugal shoe Light
Spring S. Hard
Clutch bell clearance 0.5 mm
Spring Adj. Nut position 0.8 mm

Tire Front Type FAST FAH37M Rear Type FAST FPH37M
Dia.(start) L 70 /R 70 Dia.(start) L 77 /R 77
Dia.(finish) L /R Dia.(finish) L /R


Brake pad

Black Yellow

Body Type MS Lola WC
Body position 14 mm Rear spoile 7 mm

Drive ratio

Gear ratio



1st 17 / 50
2nd 20 / 46

Pully A (25 or 26) 25T 26T

Result

Race time / Lap _____
Best lap (1Lap) _____

Comments:

.....
.....
.....