


Name: Rick Vrielijinck (STD SETUP)
Date: _____
Track: _____


Track Conditions

Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy


Front suspension

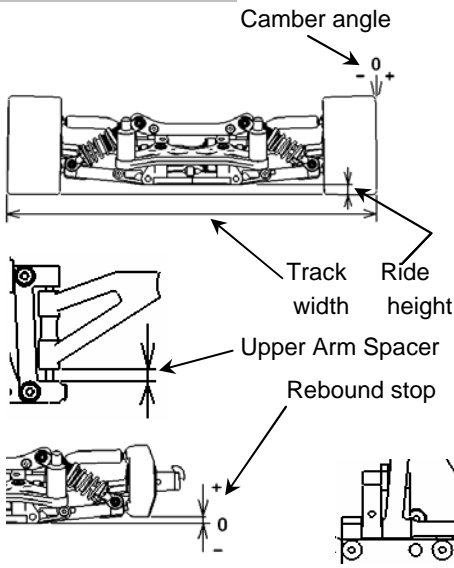



Track width 253 mm
 Ride height 7.0 mm
 Camber angle 1.5 °
 Upper Arm Spacer 2 mm
 Toe angle out 1.0 °
 Rebound stop +2 mm
 Bump stop None Use
 Lower arm spacer 0 mm
 Upper arm position 0 mm
 Anti-roll bar

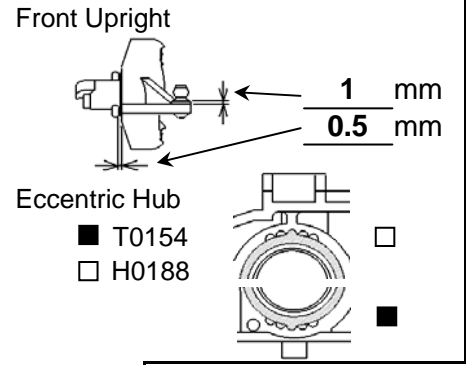

Rear suspension

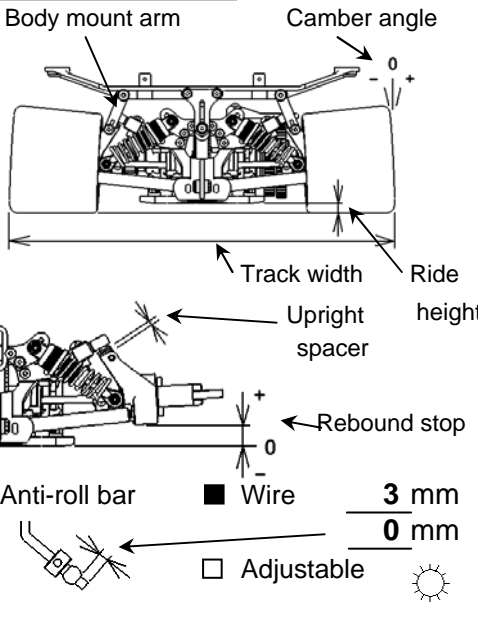

Track width 263 mm
 Ride height 8.0 mm
 Camber angle 3 °
 Toe angle 2 °
 Rebound stop +9 mm
 Bump stop None Use
 Lower arm position(H0134)
 4.5mm 5mm 5.5mm
 Upright spacer 3 mm
 Upper Arm Position
 Eccentric Hub
 T0154
 H0188
 Body mount arm
 H0466C(Short)
 H0466F(Long)



Front shock

Piston 1.1x1
 Oil # 600
 Springs White
 Shock position

Rear shock

Piston 1.1x2
 Oil # 600
 Springs White
 Shock position

Engine Type _____ Muffler _____
 Gasket _____ mm Manifold _____
 Plug _____ Fuel _____

Clutch
 Clutch shoe Yellow Gray Red
 Centrifugal shoe _____
 Spring _____
 Clutch bell clearance _____ mm
 Spring adj. nut position _____ mm

Tire <Front> <Rear>
 Type _____ Type _____
 Dia.(start) L 69 /R 69 Dia.(start) L 76 /R 76
 Dia.(finish) L /R Dia.(finish) L /R

Brake pad Black Yellow

Body Type _____
 Body position _____ mm
 Rear spoiler _____ mm

Drive ratio Gear ratio Side pulley
 1st. 17/49 25T
 2nd. 20/46 26T

Result
 Race time / Lap _____
 Best lap (1Lap) _____

Comments:

