




**Name:** \_\_\_\_\_  
**Date:** \_\_\_\_\_  
**Track:** \_\_\_\_\_

**Track Conditions**


Size:	<input type="checkbox"/> Open	<input type="checkbox"/> Med.	<input type="checkbox"/> Tight
Traction:	<input type="checkbox"/> High	<input type="checkbox"/> Med.	<input type="checkbox"/> Low
Surface:	<input type="checkbox"/> Smooth	<input type="checkbox"/> Med.	<input type="checkbox"/> Bumpy

**Front suspension**


Track width 253 mm  
 Ride height 6 mm  
 Camber angle -1.5 °  
 Caster angle 2 mm  
 Toe angle out 1 °  
 Rebound stop 1 mm  
 Bump stop  
 None  Use  
 Anti-roll bar

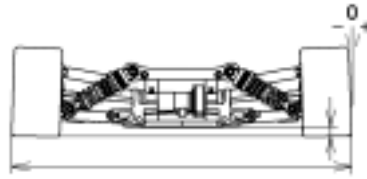

**Rebound stop**



**Caster Angle**



**Front shocks**

Piston Stock  
 Oil # 600  
 Spring Stock

**Shock position**




**Steering Ackerman**


A  B  C

**Rear suspension**

Track width 263 mm  
 Ride height 7 mm  
 Camber angle -2.5 °  
 Toe angle in 1.5 °  
 Rebound stop 8 mm  
 Bump stop  
 None  Use  
 Anti-roll bar Stock mm  
 Lower arm position  
 5.5mm(A-C)  6.5mm(B-D)  
 H0180 Position 1.5 mm

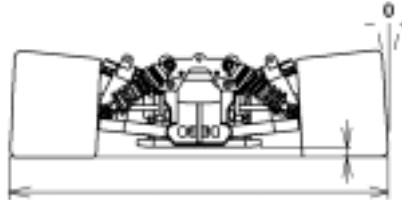

**Rebound stop**



**H0180 Position**



**Rear shocks**

Piston Stock  
 Oil # 600  
 Spring Stock

**Shock position**



**Engine**

Type \_\_\_\_\_  
 Gasket \_\_\_\_\_ mm Muffler \_\_\_\_\_  
 Plug \_\_\_\_\_ Fuel \_\_\_\_\_

**Clutch**

Clutch shoes  Black  Gray  
 Centrifugal shoe Stock  
 Spring Stock  
 Clutch bell clearance 0.4 mm  
 Spring Adj. Nut position 0.8 mm

**Tire**

Front		Rear	
Type	<u>FAH35N</u>	Type	<u>FPH35N</u>
Dia.(start)	<u>L 69 /R 69</u>	Dia.(start)	<u>L 76 /R 76</u>
Dia.(finish)	<u>L /R</u>	Dia.(finish)	<u>L /R</u>

**Brake pad**

Black  Yellow


**Body**

Type MUGEN LOLA  
 Body position 14 mm



Rear spoiler 5 mm

**Drive ratio**



**Gear ratio**

1st 17 / 49  
 2nd 20 / 46

Pully A (25 or 26)  25T  26T

**Result**

Race time / Lap \_\_\_\_\_  
 Best lap (1Lap) \_\_\_\_\_

**Comments:**

.....  
 .....  
 .....